



WATER CHILLERS AND DOSING DEVICES



WATER DOSERS AND MIXERS

DOSAMIX 1P

SIMPLY DOSAGE PROGRAMMER
ANTI-DUST KEYBOARD
IMMEDIATE READING OF THE LIQUID TEMPERATURE
WATER FITTINGS BRONZE 1/2"
MIN. FLOW RATE 3 LT/ MIN
MAX. FLOW RATE 30 LT/MIN
WATER IN PRESSURE 10 bar MAX
TEMPERATURE RANGE 2 – 60°C
DIMENSIONS 220 x 160 x 120 mm
SUPPLY 230V / 1 / 50-60 HZ



DOSAMIX ECO

HIGH PRECISION WATER DOSAGE
9 MEMORIZED DOSAGE PROGRAMS
KEYBOARD ANTIDUST
WATER FITTINGS BRONZE 1/2"
IMMEDIATE READING OF THE LIQUID TEMPERATURE
INPUT WATER FILTERS
WATER IN PRESSURE 10 bar MAX
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 30 lt / min
WATER FITTINGS BRONZE 1/2 "
TEMPERATURE RANGE 2 – 60°C
DIMENSIONS 190 X 250 X 100 mm
SUPPLY 230V / 1 / 50-60 HZ



DOSAMIX ECO MONOBLOC

MONOBLOC VERSION
HIGH PRECISION WATER DOSAGE
9 MEMORIZED DOSAGE PROGRAMS
KEYBOARD ANTIDUST
IMMEDIATE READING OF THE LIQUID TEMPERATURE
INPUT WATER FILTERS
WATER IN PRESSURE 10 bar MAX
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 30 lt / min
WATER FITTINGS BRONZE 1/2 "
TEMPERATURE RANGE 2 – 60°C
DIMENSIONS 220 x 160 x 120 mm
SUPPLY 230V / 1 / 50-60 HZ



DOSAMIX 30

9 MEMORIZED DOSAGE PROGRAMS
KEYBOARD ANTIDUST
IMMEDIATE READING OF THE LIQUID TEMPERATURE.
INPUT WATER FILTERS
IN WATER PRESSURE 10 bar MAX
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 30 lt / min
WATER FITTINGS BRONZE - INOX ½ "

TEMPERATURE RANGE 2 – 60°C
MANUAL EXTERNAL TEMPERATURE PROBE
DIMENSIONS 430 H X 320 X 180 mm
SUPPLY 230V / 1 / 50-60 HZ



DOSAMIX 30 INOX

BOX STAINLESS STEEL
HIGH PRECISION WATER DOSAGE
9 MEMORIZED DOSAGE PROGRAMS
KEYBOARD ANTIDUST
IMMEDIATE READING OF THE LIQUID TEMPERATURE.
INPUT WATER FILTERS
IN WATER PRESSURE 10 bar MAX
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 30 lt / min
WATER FITTINGS BRONZE - INOX ½ "

TEMPERATURE RANGE 2 – 60°C
MANUAL EXTERNAL TEMPERATURE PROBE
DIMENSIONS 430 H X 320 X 180 mm
SUPPLY 230V / 1 / 50-60 HZ



DOSAMIX 60

HIGH PRECISION WATER DOSAGE
9 MEMORIZED DOSAGE PROGRAMS
KEYBOARD ANTIDUST
IMMEDIATE READING OF THE LIQUID TEMPERATURE.
INPUT WATER FILTERS
IN WATER PRESSURE 10 bar MAX
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 60 lt / min
WATER FITTINGS BRONZE - INOX 3/4 "

TEMPERATURE RANGE 2 – 60°C
MANUAL EXTERNAL TEMPERATURE PROBE
DIMENSION 430 H X 320 X 180 mm
SUPPLY 230V / 1 / 50-60 HZ



DOSAMIX 60 INOX

BOX STAINLESS STEEL
HIGH PRECISION WATER DOSAGE
9 MEMORIZED PROGRAMS
KEYBOARD ANTIDUST
IMMEDIATE READING OF THE LIQUID TEMPERATURE.
INPUT WATER FILTERS
WATER IN PRESSURE 10 bar MAX
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 60 lt / min
WATER FITTINGS BRONZE – INOX 3/4 "

TEMPERATURE RANGE 2 – 60°C
MANUAL EXTERNAL TEMPERATURE PROBE
DIMENSION 430 H X 320 X 180 mm
SUPPLY 230V / 1 / 50-60 HZ



WATER COUNTERS

DOSAMAT 1P

SIMPLY DOSAGE PROGRAMMER
ANTI-DUST KEYBOARD
IMMEDIATE READING LIQUID TEMPERATURE
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 60 lt / min
WATER FITTINGS BRONZE ½ "
WATER IN PRESSURE 10 bar MAX
DIMENSIONS 220 x 160 x 120 mm
SUPPLY 230/1/50-60 Hz



DOSAMAT ECO

HIGH PRECISION WATER DOSAGE
9 MEMORIZED PROGRAM
KEYBOARD ANTIDUST
IMMEDIATE READING LIQUID TEMPERATURE
INPUT WATER FILTERS
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 60 lt / min
WATER FITTINGS BRONZE ½ "
WATER IN PRESSURE 10 bar MAX
DIMENSIONS 190 X 250 X 100 mm
SUPPLY 230/1/50-60 Hz



DOSAMAT

HIGH PRECISION WATER DOSAGE
9 MEMORIZED PROGRAM
KEYBOARD ANTIDUST
PARTIAL FLOW MEMORY
IMMEDIATE READING LIQUID TEMPERATURE
INPUT WATER FILTERS
WATER FLOW MIN 3 lt / min
WATER FLOW MAX 60 lt / min
WATER FITTINGS BRONZE ½ "
WATER IN PRESSURE 10 bar MAX
MANUAL EXTERNAL TEMPERATURE PROBE
DIMENSIONS 430 X 320 X 180 mm
SUPPLY 230/1/50-60 Hz



STANDARD WATER CHILLERS



CW 1000 5 - 7.5 - 10 Hp



CW 100 / 200 / 300 / 500

| | CW 100 | CW 200 | CW 300 | CW 500 | CW 1000 5HP | CW1000 7.5HP | CW 1000 10HP |
|---|-----------------|------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| TANK AISI 304 CAPACITY LT | 100 | 200 | 300 | 500 | 1000 | 1000 | 1000 |
| COMPRESSOR HP | 0,5 H | 1,2 H | 3.2 H | 3,5 SE | 5 SE | 7.5 SE | 10 SE |
| RECYCLING PUMP | 1 | 1 | 2 | 2 | 1 HP INOX | 1 HP INOX | 1 HP INOX |
| TEMPERATURE CONTROL | DIGITAL | DIGITAL | DIGITAL | DIGITAL | DIGITAL | DIGITAL | DIGITAL |
| AUTOCLAVE PUMP | 0.5HP BRONZE | 0.5 HP BRONZE | 1 HP INOX | 1 HP INOX | 1 HP INOX | 1 HP INOX | 1 HP INOX |
| AUTOMATIC WATER INPUT | SOLENOID | SOLENOID | SOLENOID | SOLENOID | SOLENOID | SOLENOID | SOLENOID |
| SAFETY WATER OUTPUT / FITTINGS CONNECTIONS | ½ INCH | ½ INCH | ¾ INCH | ¾ INCH | ¾ INCH | ¾ INCH | ¾ INCH |
| PRODUCTION LT / HOUR +18 °C + 3 C ° | 70 | 150 | 300 | 450 | 600 | 1000 | 1500 |
| SUPPLY | 230 V / 1 / 50 | 230V/ 1/50 | 400 V/ 3/50 | 400 V / 3/ 50 | 400 V/ 3/50 | 400 V/ 3/50 | 400 V/ 3/50 |
| LENGHT mm | 600 | 600 | 1000 | 1200 | 1250 | 1250 | 1300 |
| WIDTH mm | 600 | 600 | 800 | 1200 | 2400 | 2500 | 3500 |
| HEIGHT mm | 1200 | 1600 | 1700 | 1500 | 1300 | 1300 | 1600 |
| WEIGHT Kg | 100 | 150 | 280 | 350 | 550 | 650 | 700 |
| SUPPORT | 4 WEELS | 4 WEELS | LEVELLING FOOTS | LEVELLING FOOTS | LEVELLING FOOTS | LEVELLING FOOTS | LEVELLING FOOTS |



CONTROL PANEL



FITTINGS CONNECTIONS / SOLENOID

WATER CHILLER ECONOMY CWE 175

| | |
|--|--------------------|
| TANK AISI 304 CAPACITY LT | 175 |
| POWER KW | 0.75 |
| COMPRESSOR HP | 1 |
| VERTICAL WATER SHACKER | 1 |
| TEMPERATURE CONTROL | ELECTROMECC |
| WATER INPUT | FLOAT |
| PRODUCTION LT / HOUR +18 °C + 3 C ° | 100 |
| SUPPLY | 230 V / 1/50-60 Hz |
| LENGHT mm | 1000 |
| HEIGHT mm | 900 |
| WIDTH mm | 550 |
| WEIGHT Kg | 120 |



FAST WATER CHILLERS SERIES CWR

TANK AISI 304 CAPACITY LT 50 - CWR 50

| | |
|--|----------------|
| POWER KW | 1.0 |
| COMPRESSOR HP | 1,2 |
| Nr RECYCLING PUMP | 1 |
| TEMPERATURE CONTROL | DIGITAL |
| WALL BRACKET | INCLUDED |
| AUTOMATIC WATER INPUT | SOLENOID |
| SAFETY WATER OUTPUT PIPE | ½ INC |
| PRODUCTION LT / ORA +18 °C + 3 C ° 50 LT / 20 MIN | 150 |
| DOSING SYSTEM | CWR-D |
| HEATING + DOSING WATER | CWR-RD |
| SUPPLY | 230 V/1/ 50 Hz |
| LENGHT mm | 1000 |
| WIDHT mm | 600 |
| HEIGHT mm | 600 |
| WEIGHT Kg | 100 |



TANK AISI 304 CAPACITY LT 100 - CWR 100

| | |
|---|-----------------|
| POWER KW | 3.0 |
| COMPRESSOR HP | 3.2 |
| Nr RECYCLING PUMP | 1 |
| TEMPERATURE CONTROL | DIGITAL |
| AUTOCLAVE PUMP | 0.5 HP BRONZE |
| AUTOMATIC WATER INPUT | SOLENOID |
| SAFETY WATER OUTPUT PIPE | ½ INCH |
| PRODUCTION LT / ORA +18 °C + 3 C ° 100 LT / 20 MIN | 300 |
| DOSING SYSTEM | CWR-D |
| HEATING + DOSING WATER | CWR-RD |
| SUPPLY | 400 V / 3/50 Hz |
| LENGHT mm | 1000 |
| WIDHT mm | 700 |
| HEIGHT mm | 1100 |
| WEIGHT Kg | 200 |




CONTROL PANEL CWR




CONTROL PANEL CWR - D CWR - RD

CONSTANT FLOW WATER CHILLERS

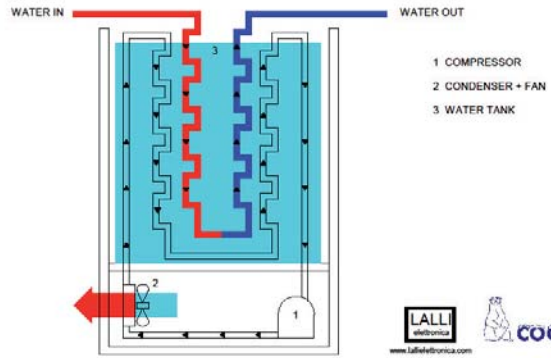

HORIZONTAL CWC 100 VERTICAL CWC 100 V - CWC 200 V

| | | |
|---|------------------|---------------|
| TANK CAPACITY LT | 100 | 200 |
| COMPRESSOR GAS R 404 A | 1 HP | 2 X 1 HP |
| POWER | 1 KW | 2 KW |
| TEMPERATURE CONTROL | DIGITAL | DIGITAL |
| PRODUCTION LT / H IN + 18°C OUT +3°C | 100 | 200 |
| COSTANT FLOW LT / MIN | 5 | 10 |
| WATER SHAKER | VERTICAL | VERTICAL |
| SUPPLY | 230 V / 1 / 50 | 230 / 1 / 50 |
| DIMENSION mm | 1000 X 500 X 500 | 1000X500X1000 |
| WEIGHT | 110Kg | 250 KG |
| OPTION DOSING UNIT MODEL | CWC 100 D | CWC 200 D |

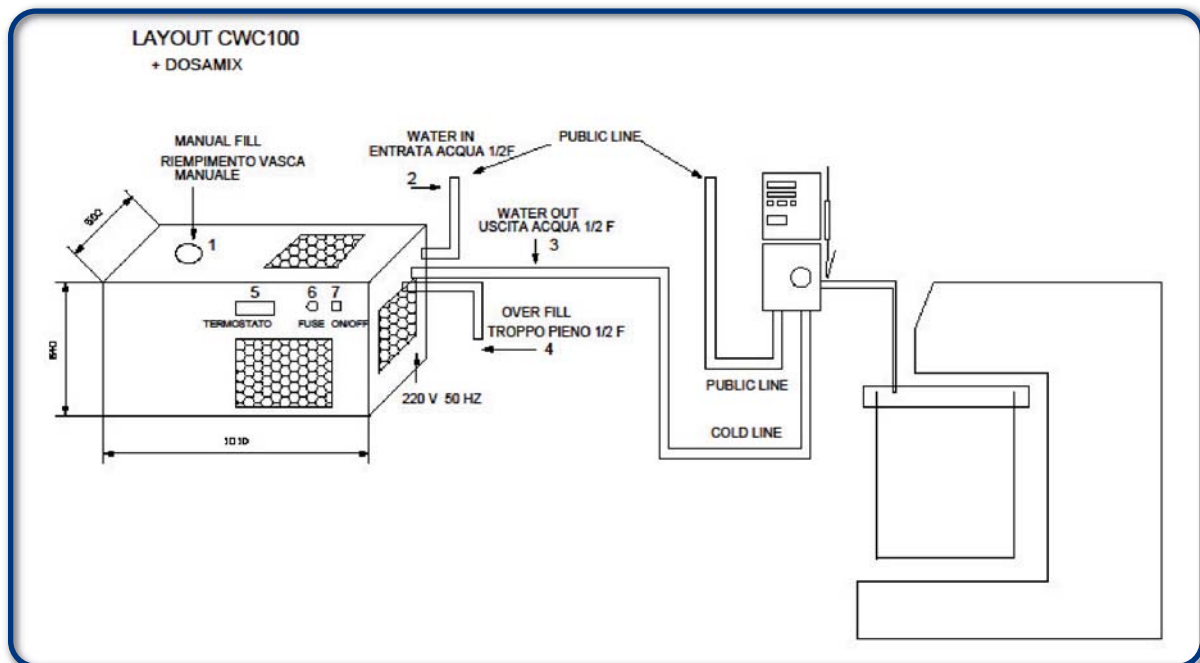

BREAD MILLS

CIRCLE BREAD MILL 1 HP

Motor power : 1 HP
Production 70 Kg / h
Body in Stainless Steel / aluminium
Motor with thermal overload protection
Dimensions: 250 x 320 x 1100 mm -
Supply 400 / 3 / 50-60 Hz
Power 0.75 Kw
Weight Kg 25



SCM 230/1 HP

Motor power : 1 HP 2800 rpm
Production 90 Kg / h
Body in Stainless Steel / aluminium
Motor with thermal overload protection
Dimensions : 450 x 450 x 900 mm
Supply 400 / 3 / 50-60 Hz
Power 0.75 Kw
Weight Kg 30



3 HP 2M 5 HP 2M TWIN MOTORS

Motor power :
3 HP – 5 HP 2800 rpm
Shaker Motor + Gear 0.5 HP
Production
300 Kg / h (3 Hp)
500 Kg / h (5 Hp)
All in Stainless Steel
Motors with thermal overload protection
Dimension loading hopper 600 x 600 h 500
Dimensions body : 650 x 650 x 1800 mm –
Supply 400 / 3 / 50 - 60 Hz
Power 2.6 Kw
Net Weight Kg 75



www.lallielettronica.com - info@lallielettronica.com - sales@lallielettronica.com

Tel. +39 0774 572883 - Fax +39 0774 689988

Guidonia - Roma - Italy